

R4D450-AK01-01

# AC centrifugal fan

backward curved, single inlet



## ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

## Nominal data

Type	R4D450-AK01-01				
Motor	M4D110-GF				
Phase		3~	3~	3~	3~
Nominal voltage	VAC	230	230	400	400
Connection		$\Delta$	$\Delta$	Y	Y
Frequency	Hz	50	60	50	60
Type of data definition		ml	ml	ml	ml
Valid for approval / standard		CE	CE	CE	CE
Speed	min <sup>-1</sup>	1350	1490	1350	1490
Power input	W	740	1090	740	1090
Current draw	A	2.6	3.32	1.5	1.92
Min. back pressure	Pa	0	0	0	0
Max. ambient temperature	°C	80	50	80	50

ml = max. load · me = max. efficiency · rfa = running at free air · cs = customer specs · cu = customer unit  
Subject to alterations




### Technical features

Leakage current	<= 3.5 mA
Size	450 mm
Operation mode	S1
Direction of rotation	Clockwise, seen on rotor
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Humidity class	F3-1
Insulation class	"F"
Condensate discharge holes	Rotor-side
Motor bearing	Ball bearing
Mass	12 kg
Material of impeller	Aluminium sheet
Motor protection	Thermal overload protector (TOP) brought out
Product conforming to standard	CE; EN 61800-5-1
Surface of rotor	Cast in aluminium
Number of blades	6
Type of protection	IP 54
Protection class	I
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Approval	CCC; CSA C22.2 Nr.100; GOST; UL 1004-1; VDE

# AC centrifugal fan

backward curved, single inlet


## Product drawing

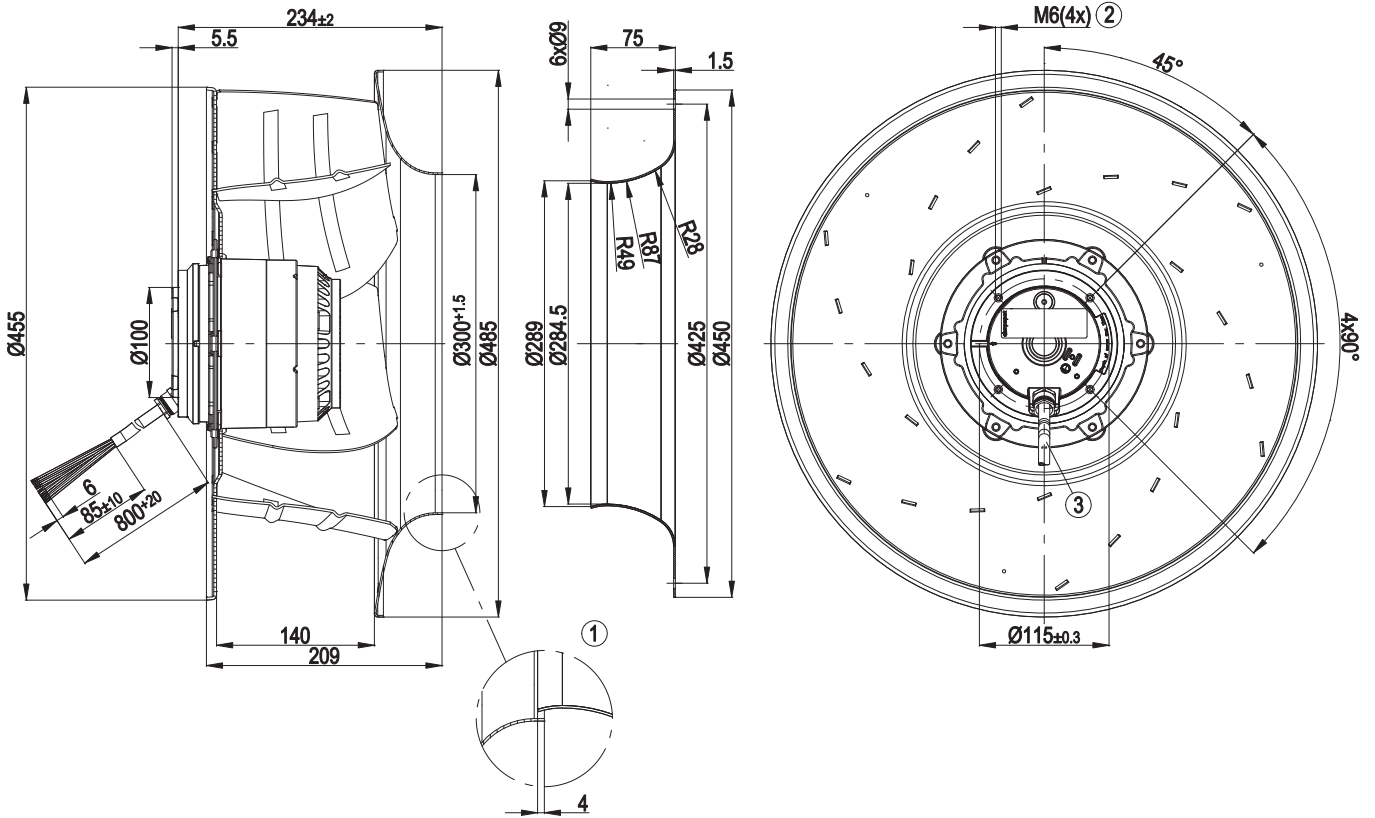

1	Accessory part: inlet nozzle 63045-2-4013 not included in the standard scope of delivery; other inlet nozzles on request
2	Depth of screw max. 12 mm
3	Connection line silicone 9G0.75 mm², 9 x brass lead tips crimped




## Connection screen

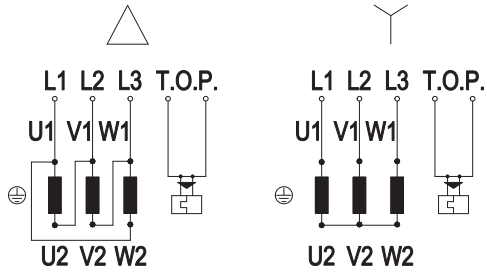

Note: Direction of rotation changes when two phases are reversed

$\Delta$	Delta-connection	Y	Star connection	L1	black
L2	blue	L3	brown	U1	black
U2	blue	W1	brown	U2	green
V2	white	W2	yellow	TOP	grey

## Charts: Air flow 50 Hz

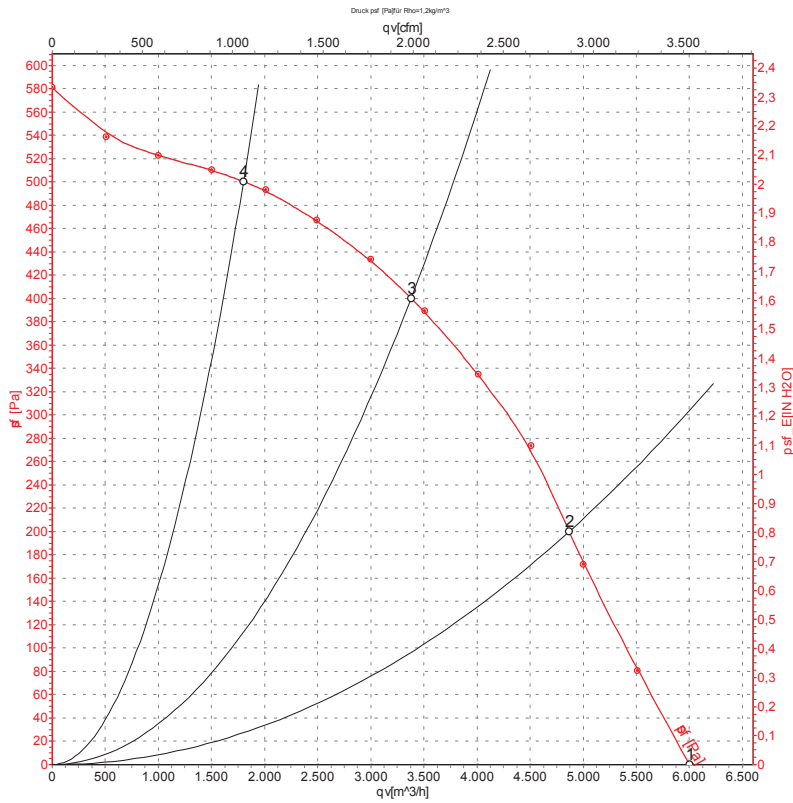

Measurement: LU-101530


Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebmpapst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

	Conn.	U	f	n	P <sub>e</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	qv	p <sub>sf</sub>
		V	Hz	min <sup>-1</sup>	W	A	dB(A)	dB(A)	m <sup>3</sup> /h	Pa
1	Y	400	50	1395	566	1.26	71	79	6000	0
2	Y	400	50	1365	670	1.37	66	75	4870	200
3	Y	400	50	1350	740	1.50	63	70	3380	400
4	Y	400	50	1375	617	1.31	68	76	1800	500



## Charts: Air flow 60 Hz

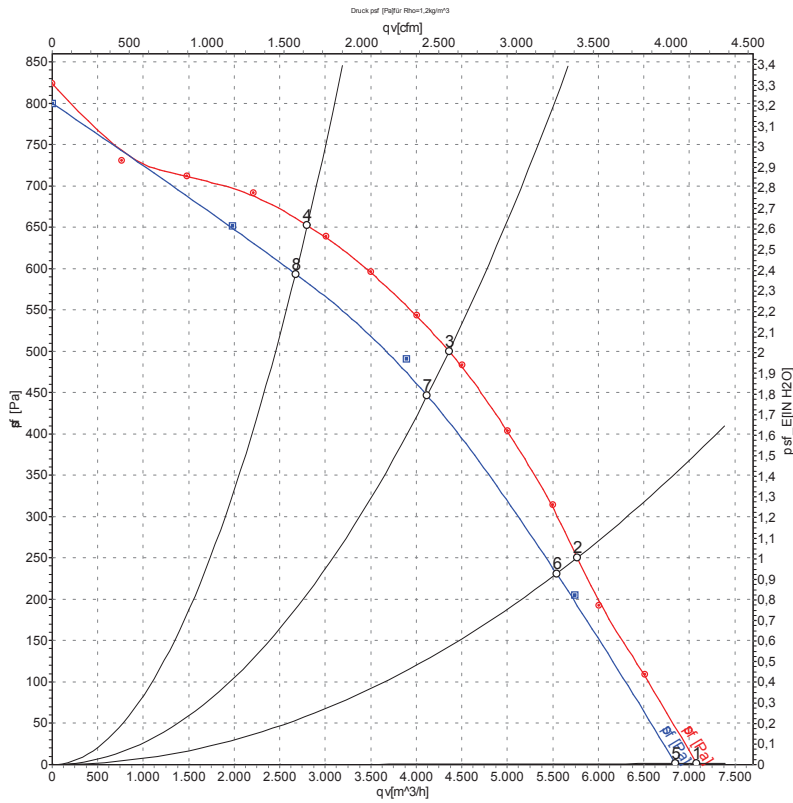

Measurement: LU-101532  
Measurement: LU-101546

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

	Conn.	U	f	n	P <sub>e</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	qv	p <sub>sf</sub>
		V	Hz	min <sup>-1</sup>	W	A	dB(A)	dB(A)	m <sup>3</sup> /h	Pa
1	Y	480	60	1640	918	1.49	75	83	7080	0
2	Y	480	60	1605	1084	1.67	71	79	5770	250
3	Y	480	60	1580	1200	1.85	67	75	4360	500
4	Y	480	60	1600	1100	1.68	70	78	2800	650
5	Y	400	60	1575	845	1.50	74	82	6845	0
6	Y	400	60	1530	973	1.71	69	77	5540	235
7	Y	400	60	1490	1090	1.92	65	74	4120	456
8	Y	400	60	1530	970	1.67	69	77	2675	594

